



ACTIVATION MANUAL

Step 1:

Connect **POWER SUPPLY** cable to **USB** port on **Your PC**, and to power female connector on **Ultima Box**. The box will power on.

Press and **HOLD** "enter" key, then press and release "reset" key. The box now will reboot and show its **BOX ID** and firmware version:

Step 2:

Open this web page: <http://members.turbo-support.com/users/register.php> .

Fill out the registration form, and press "SUBMIT" button. **DO NOT** enter any spaces or dashes in "Serial number" field. Your **BOX ID** is 28 characters long. After Your registration is processed by server, You will have an e-mail containing the activation link for Your account. Open that link in Your browser, and Your account will be activated.

If You receive error message "This serial number is not valid" please do the following:

- Provide Your reseller with **BOX ID**, and request account activation.
- Be patient and wait few hours till this is processed.

If Your reseller don't reply in timely manner, send an email to legija@legija.net with Your **BOX ID** and reseller name.

Now when You activated Your account at turbo support, please log in and download following files:


Ultima Box\MotoRockerv1.01.rar

Ultima Box\UBOXClient_NEW.exe


Ultima Box\ MotoRocker Files\Cable Driver\ PL-2303 Driver Installer.exe

Step 3:


Start the **UBOXClient_new.exe** and make sure You have internet connection, with disabled firewall. Press **settings -> connection** .

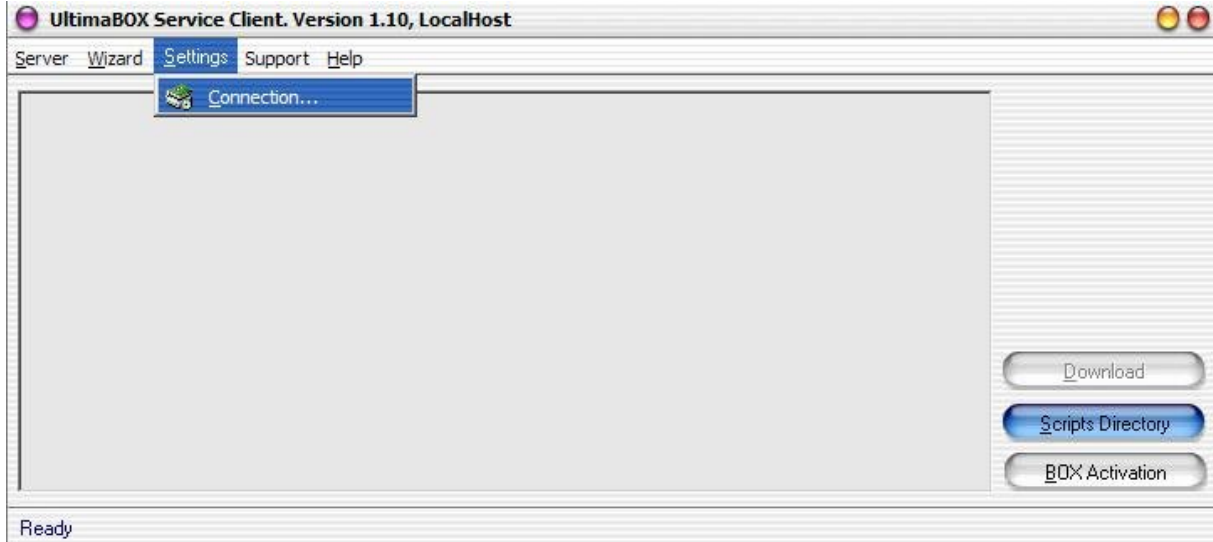

Type Your **BOX ID** in appropriate field, and in variable password field type Your box signature. If Your box has 1.08 firmware it will **NOT SHOW** Box Signature field. In this case, in Variable password field You need to type **"FFFF-FF-FF"** .

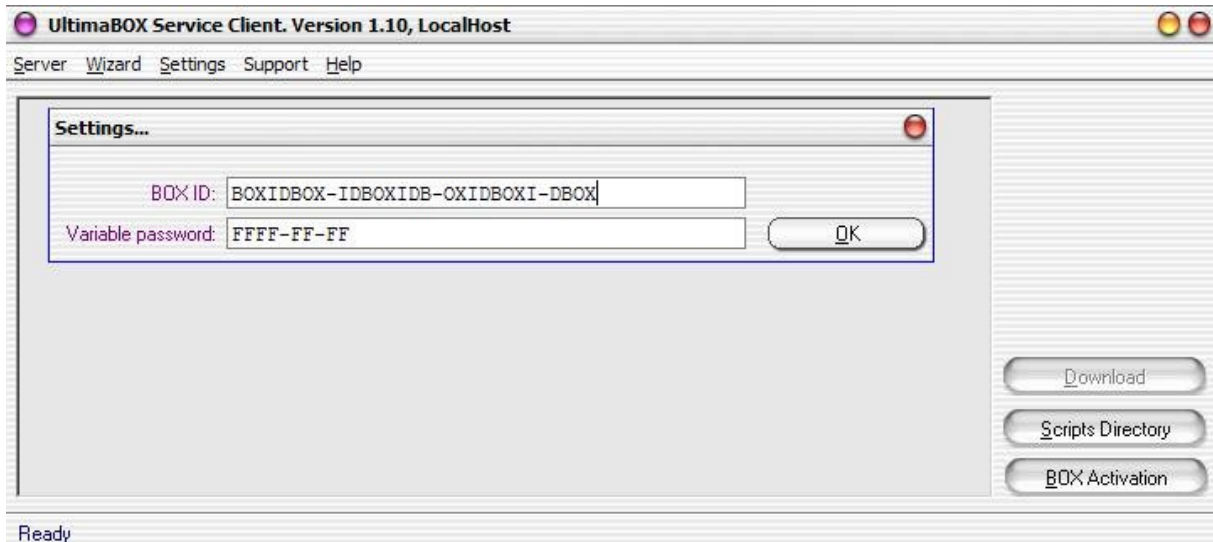

Now press "**Scripts Directory**" button. Client will log into server, and if all is ok, You will have the following screen:

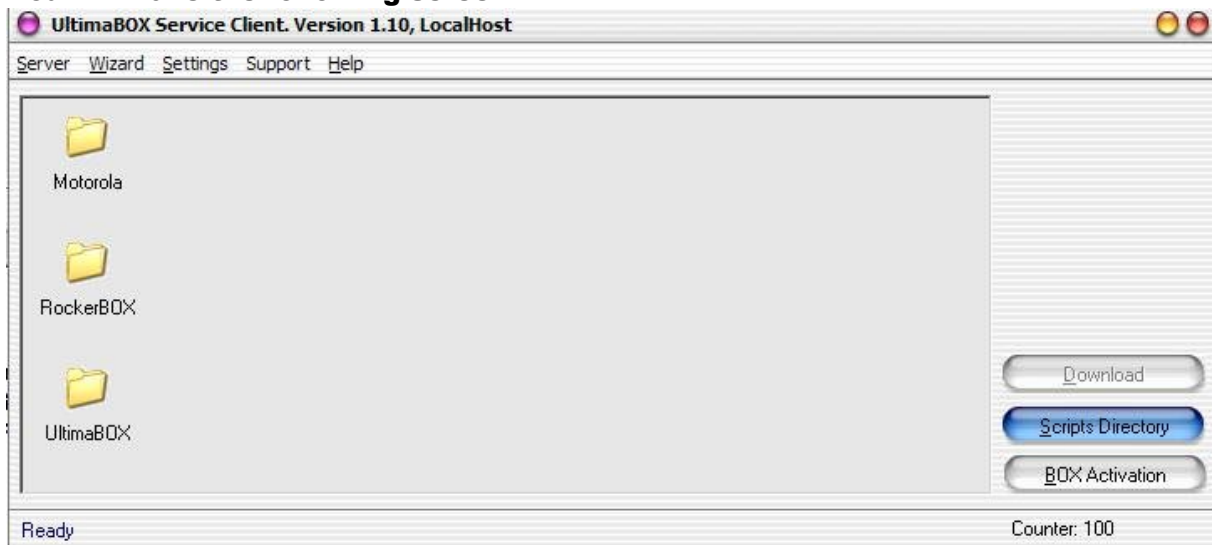


Now open "**UltimaBOX**" folder, and double click to "**Firmware_Update_v1.10.usp**". Select location to save this file, and after download, exit "**UltimaBOX**" directory. Now You can click to "**Box Activation**" button, located at right . The client will save box activation file to "**Activation**" folder, in same folder where You have started the UBOXClient.

After these steps are completed, open "**Motorola**" folder in UBOXClient window, and download all files one by one. Keep all downloaded files in safe place .


DO NOT open "RockerBOX" folder yet !!!

Step 4:

Connect the USB Stick to USB port on Your PC. Format it to FAT16 (FAT if You use windows XP)

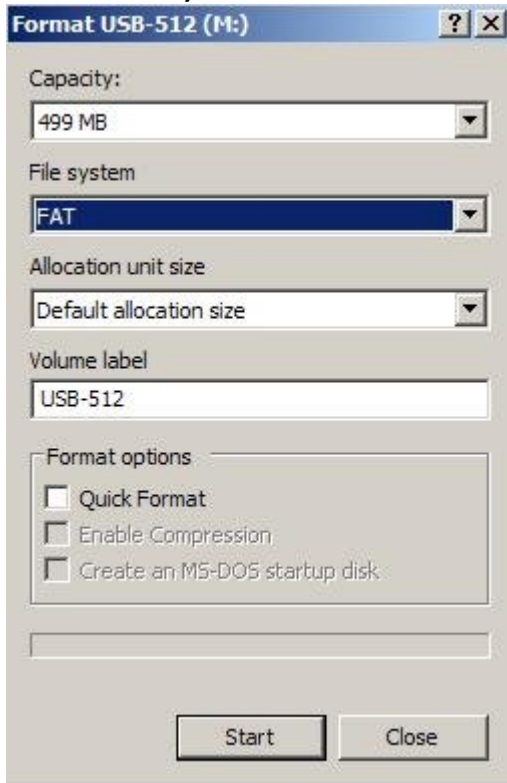

Now locate saved files on Your PC. Double click each file one by one, and install them to USB Stick. In UBOXClient You have to choose drive letter which matches Your USB Stick :

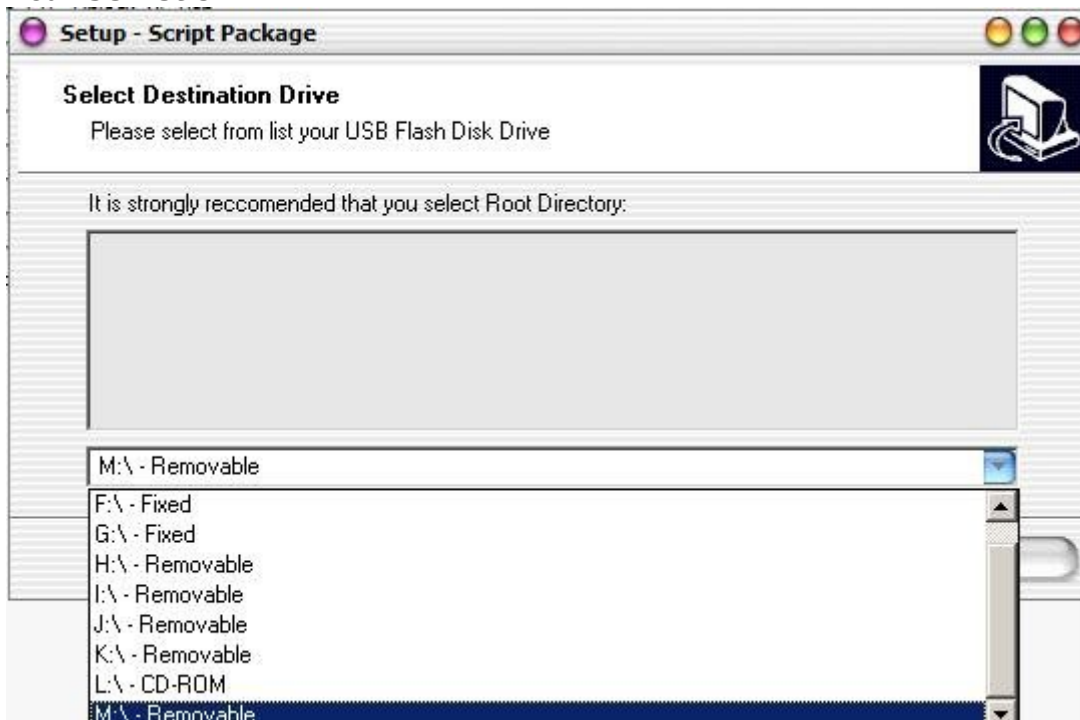


After all files are installed, You can now proceed to box firmware update and activation:

Connect USB Stick to UPPER USB port on Your Box, and scroll DOWN the joystick. You will have the " BOX SW Update" screen. Scroll RIGHT the joystick and confirm "YES" with ENTER key. Wait for process to be finished, and box to be restarted.


The Box will show now "Services" screen. Scroll joystick to the right, and box will ask You to activate the box. Confirm "YES" with ENTER key. With this part the box activation is finished. Now You can use Your box as standalone device.

USING THE MOTOROCKER

Run the " PL-2303 Driver Installer.exe " You've previously saved. Reboot the PC afterwards. Connect the MotoRocker cable to USB port, and install its drivers if requested. Connect power cable to Box without USB Stick attached. Connect the MotoRocker cable to RJ45 port on box. Start the MotoRocker software now :

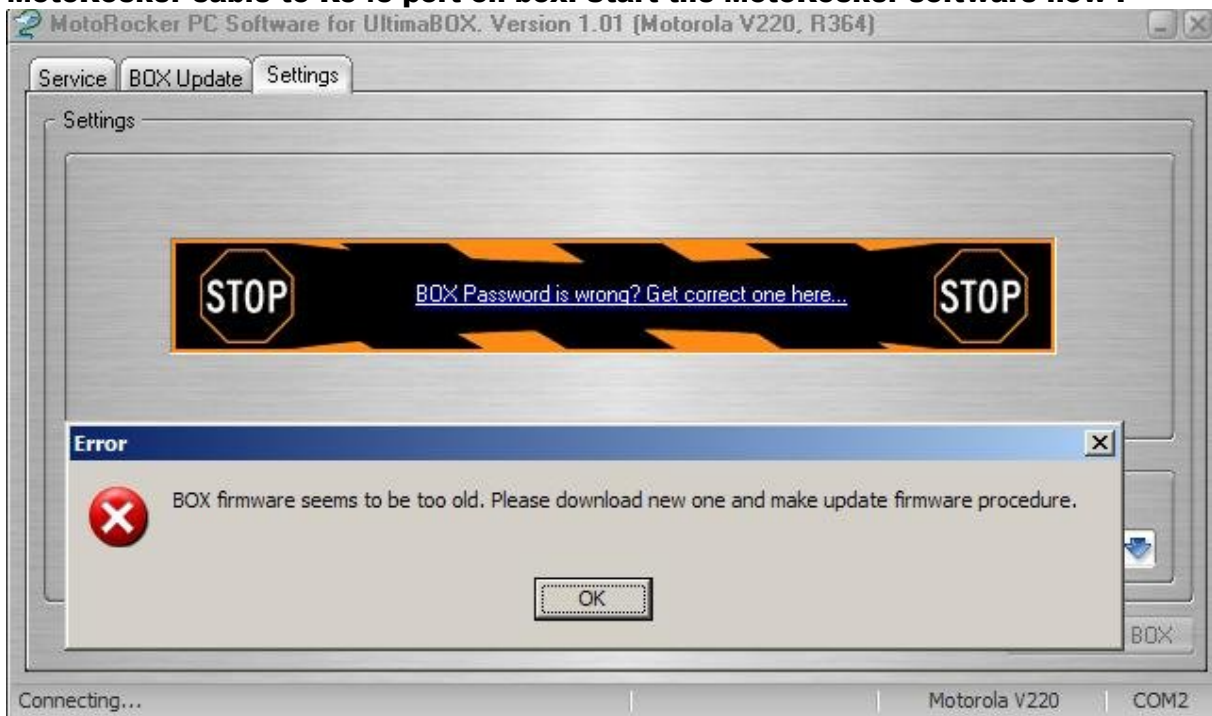

Press OK, and then You will have the following screen:

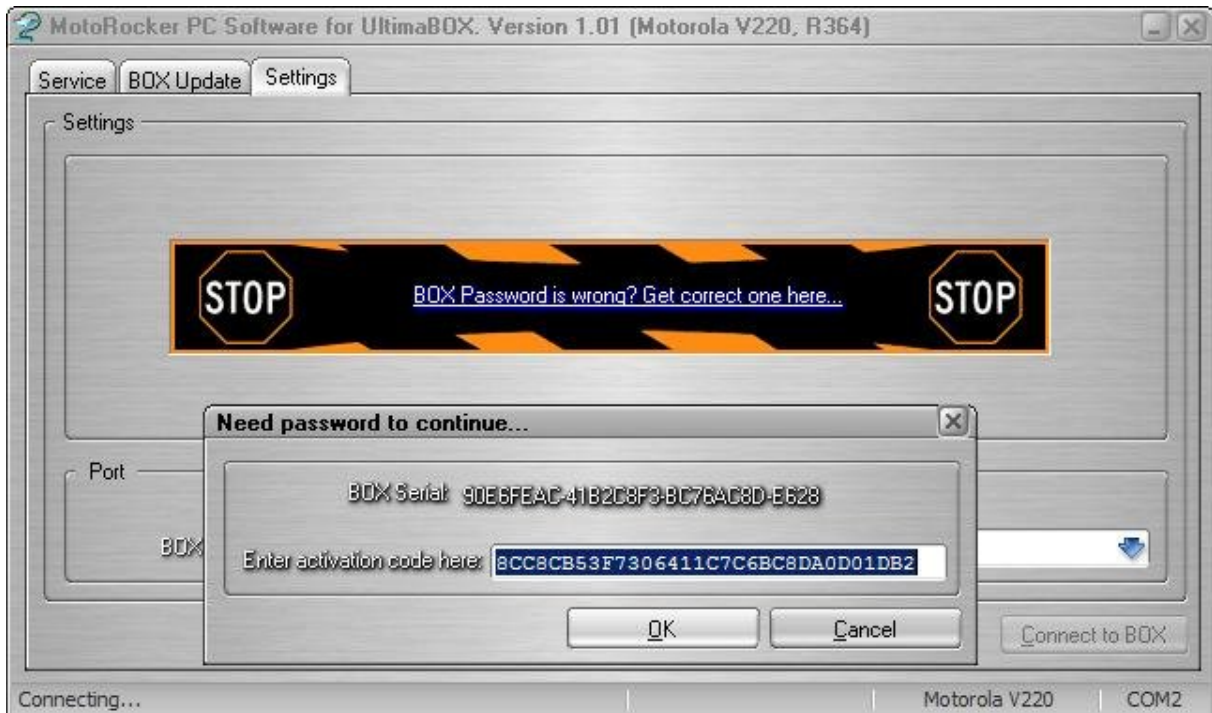

To obtain Your Box password, please log in to [Turbo Support](#), and proceed to "User Control Panel". Click to "Show Ultima Password**" link, and then copy the password to MotoRocker popup box, and press OK.**

Run the UBOXClient, and press "Script Directory**". Open "**RockerBox**" folder and download "**R Firmware_Update_v1.10.usp**". **DO NOT download this file more than once.****

You can install this file to any drive, but best idea is to have it on safe location. Now switch to "BOX Update" tab in MotoRocker, and select "UpdateSW.rdf" file You've just installed. Press "Start Update" and wait till process is finished, and Box restarted. After this step Your Box will have signature field. Take note – each time You download RockerBox firmware, the signature will be changed. This means – Your variable password for server will be also changed, matching Box signature. If You download RockerBox firmware by mistake, make sure You update box with that last file, otherwise, Your account on UBOXServer will not work.

That should be it – if there is any problem which is not mentioned in this document, please visit Ultima Box section at www.unlockforum.net and explain Your problem.

Best Regards, Legija .